

TRISTAR

The Imagers


QF-Imager (hybrid, Flash and hot light in one unit)

New !!!

with built-in 4 channels radio receiver to trigger flash

Now, no more sync lead to connect to your camera, although it has provision for that, the nightmare of attaching wire to the tiny pc outlet on your camera is over. There is even a worse scenario, your new digital camera does not have a pc outlet, but only a flash shoemount. We have 4 models of 2 power version, 200 and 500 joules. One 200 Joules model has a wireless radio triggering system built-in, and one hasn't. Same thing with the 500 Joules models. The wireless version can trigger a flash 80ft away. All models have a slave sensor and a 6.3mm sync socket. All flash units have an auto dump feature, and accept all Imager accessories. On the QF-200R unit, there is no antenna sticking out, and no channel switch to set, you just set the channel on the transmitter, turn on the flash unit, press the test button and the flash will lock in the channel that you set on the transmitter automatically. If you want to change the channel, simply set the dip switch on transmitter and turn off the unit, then turn it back on again, press the test button and the unit will lock in the new channel. It is that simple.

On the other side of the Hybrid QF-Imager, which is also a constant hot light lamphead, you can put a photoflood bulb up to 500w on the unit, and it has stepless dimmer control on the light. So if you want to use constant light for imaging, turn off the flash. There are varieties of bulbs to choose from, (see out bulb leaflet) the picture here is a 4800K 250w daylight bulb, available from photo dealers,(not our product) you can use also any photoflood 3200K bulb up to 500W, as long as they have a E-27 screw base, and of course, it is better to use our ultra bright, JDD250FR quartz halogen bulb, which has a 100 hour bulb life, because the color remains constant throughout the life cycle. This bulb comes with the unit when you purchase it. The unit is constructed mostly by aluminum and ceramic material, so no more melting plastic!

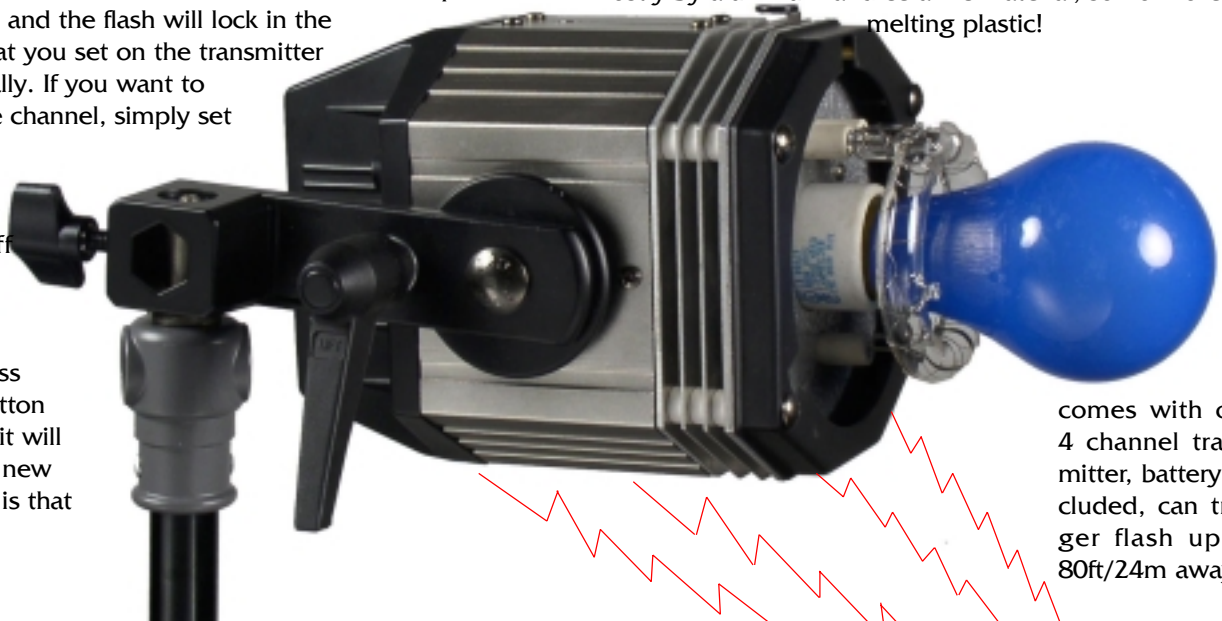

comes with one 4 channel transmitter, battery included, can trigger flash up to 80ft/24m away.

- QF-200R/xxx*** with photo slave and radio triggering system
- QF-200/xxx*** with photo slave triggering system
- QF-500R/xxx*** with photo slave and radio triggering system
- QF-500/xxx*** with photo slave triggering system

*xxx indicates operating voltage

Technical specifications are subject to change without prior notice



TRISTAR Photo Industrial Co. Email triphoto@biznetvigator.net Website: www.tristar-photo.com

11 Lung Tak St. 24/F. #7 Tsuen Wan Hongkong SAR PRC Ph. +852 2408 6079 Fax +852 2409 9408

The Imagers

TRISTAR

QF-Imagers (hybrid, flash and hot light in one unit)

Plug-in flash tube,
50000 life cycle.

Bayonet mount



E-27 ceramic screw socket.

Flash ready LED, flash power indicator.

Power socket, fused.

Illuminated power switch.


Hot light dimmer

Flash power, on/off switch

Sync outlet

Radio/Sensor switch.

Sensitive photo slave

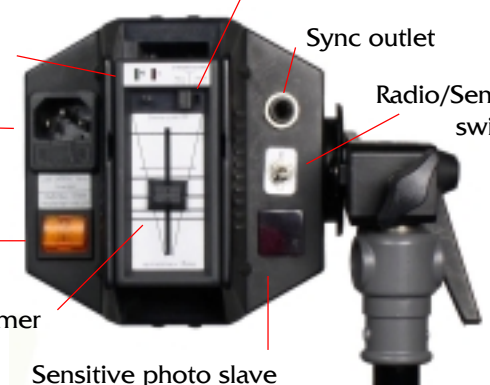

Model

QF-500R/xxx

QF-500/xxx

QF-200/xxx*

***QF-200R/xxx**

Specifications:

Voltage:	110-130Vac, or 220-240Vac.
Flash power:	200 joules
Flash tubes:	Ring type
Bulb life:	50,000
Color temperature:	5600K
Hot light dimmer:	Yes.
Flash power control:	Half, full.
Recycle:	1 sec.
Lamphead cooling:	Fan-less, noiseless.
Casing:	Aluminum/Engineering plastic.
Reflector:	Wide angle 120 degree.
Mounting bracket:	5/8"/16mm stand spigot.
Flash auto dump:	Yes.
Accessories:	All accessories of Imagers.
Power cable:	Detachable, 12ft/3.5m, 3 wire.
Fuse:	6A or 3A, with spare fuse.
Size:	5x5x7"/12.5x12.5x17.8cm.
Weight:	3.8lb/1.7kg.

QF-500/xxx*

***QF-500R/xxx**

Voltage:	110-130Vac, or 220-240Vac.
Flash power:	500 joules
Flash tubes:	Ring type
Bulb life:	10,000
Color temperature:	5600K,
Hot light dimmer:	Yes.
Flash power control:	Quarter, half, full.
Recycle:	2.5 sec.
Lamphead cooling:	Fan-less, noiseless.
Casing:	Aluminum/Engineering plastic.
Reflector:	Wide angle 120 degree.
Mounting bracket:	5/8"/16mm stand spigot.
Flash auto dump:	Yes.
Accessories:	All accessories of Imagers.
Power cable:	Detachable, 12ft/3.5m, 3 wire.
Fuse:	10A or 5A, with spare fuse.
Size:	5x5x12"/12.5x12.5x30.5cm.
Weight:	4.6lb/2.1kg.

All QF-Imagers come with protective cap, 1 250W Quartz halogen bulb, QFH-120 wide angle reflector, 12ft power cord, sync cord. Radio version comes with one transmitter, runs on small 12v battery,(included) QF-500 has extra detachable carry handle.

**with wireless radio triggering system*

** xxx indicates operating voltage.*

All specifications are subject to change without prior notice.

TRISTAR Photo Industrial Co. Email triphoto@biznetvigator.net Website: www.tristar-photo.com

11 Lung Tak St. 24/F. #7 Tsuen Wan Hongkong SAR PRC Ph. +852 2408 6079 Fax +852 2409 9408