

TRISTAR

The Imagers

Flasi-Imager powerful self contained flash units


Model F-600
Model F-1000
available in 120V or 220V

The *Flasi-Imager* is a professional powerful studio flash unit. There are two models to choose from, F-600 and F-1000.

The features of these flash units are dependable, easy to maintain, easy to control. The control panel can be removed from the unit and mounts on stand or boom 4 ft away connected by built-in coiled cord. The power selection is stepless, can be sync with model lamp or not. Fan-less, no noise, user replaceable flash tubes, E-27 model lamp base, fast release bayonet mount reflector. The stand mounting bracket is fitted with ball bearing. Positive lock for heavy softbox. The whole unit is self-contained, easy for storage in carrybag. State of art circuitry, LED indicator, inter-changeable circuit board for easy maintenance, built-in slave sensor, comes with 5 m/16' sync cord. 1, standard 65 degree reflector, 1, wide angle umbrella reflector, 1, four leafs barndoor with magnetic filter holder. All in one package.

Optional **RT-03K** Radio flash trigger and **DS-2**, digital camera delay sync pulg in sensor are available to enhance the flash unit.

Comes with detachable handle. (not shown)

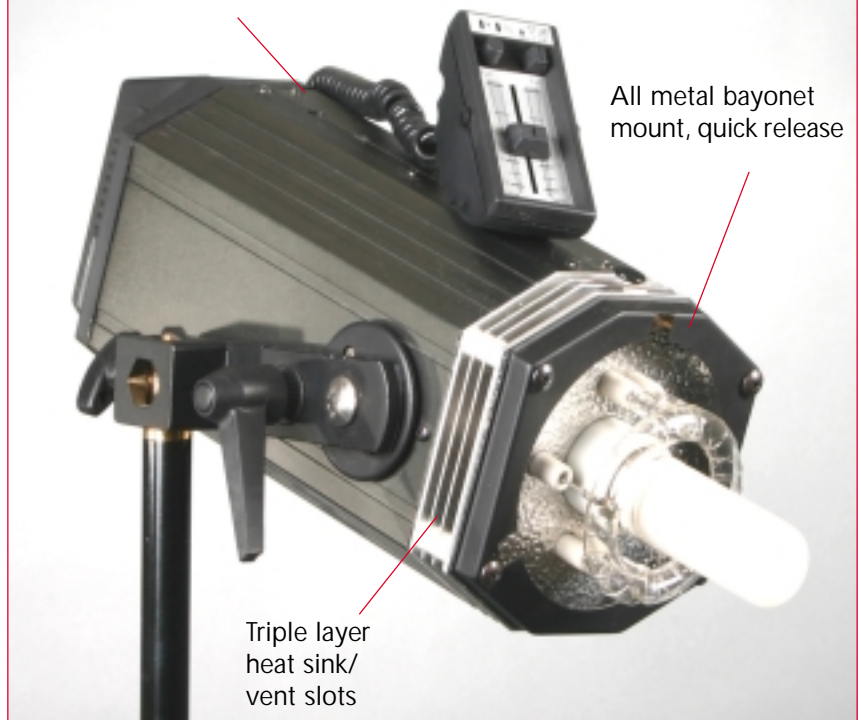


All metal bayonet mount, quick release


Triple layer heat sink/vent slots

F-1000 Power output 1000 joules, recycle time 2.5 sec. Auto dump power, 250W 3200K model lamp, Flash duration 1/500 sec. coated flash tubes, Stabilizer on circuit board. All metal casing except rear end cap of engineering plastic. Accepts all Imager accessories. Weight: 7 lbs Size: 13x6x6"

F-600 is a popular size flash unit, it has all the characteristic of F-1000 but is smaller in size. Output power is 600 joules, power cord is 12ft. Recycle time is 1.5 sec at full power. Weight: 5 lbs. Size: 11x6x6"

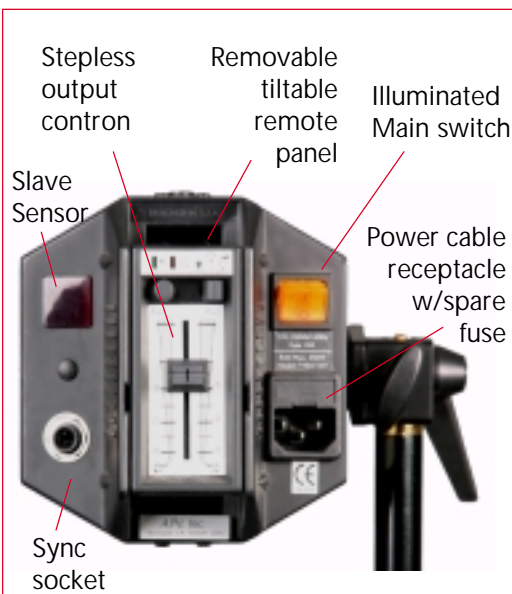

Slave Sensor
Sync socket
Steppless output contron
Removable tiltable remote panel
Illuminated Main switch
Power cable receptacle w/spare fuse

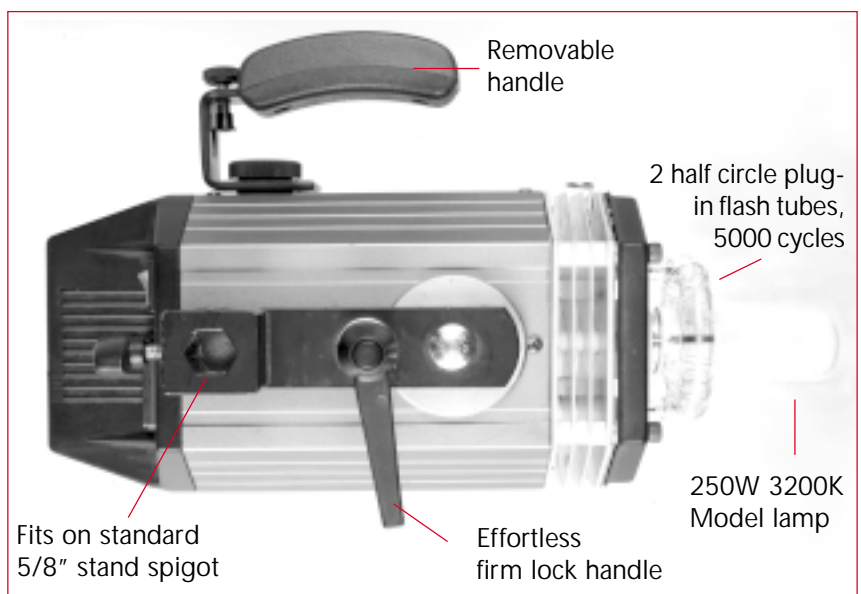

Removable handle
2 half circle plug-in flash tubes, 5000 cycles
250W 3200K Model lamp
Effortless firm lock handle
Fits on standard 5/8" stand spigot

Tristar Photo Industrial Co.

11 Lung Tak St. 24/F. #7 Tsuen Wan Hongkong SAR

Ph. +852 24086079 Fax +852 24099408 Email triphoto@biznetvigator.net www.tristar-photo.com

The Imagers

TRISTAR

QF-Imagers (hybrid, flash and hot light in one unit)

Plug-in flash tube,
50000 life cycle.

Bayonet mount




E-27 ceramic screw socket.

Flash ready LED, flash power indicator.

Power socket, fused.

Illuminated power switch.

Hot light dimmer

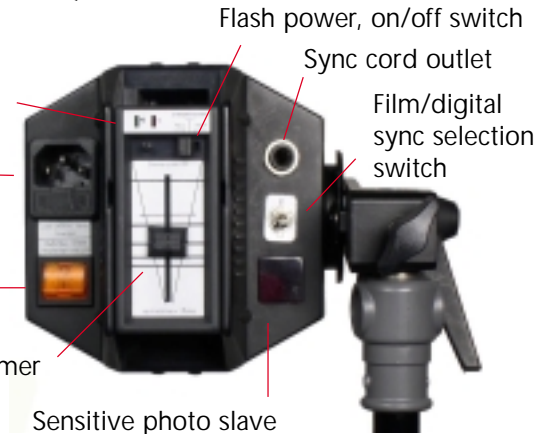

Flash power, on/off switch

Sync cord outlet

Film/digital sync selection switch

Sensitive photo slave



Specifications: *QF-200R*

Voltage: 110-130Vac, or 220-240Vac.
Flash power: 200 joules
Flash tubes: Ring type (user replaceable)
Bulb life: 50,000
Color temperature: 5600K
Hot light dimmer: Yes.
Flash power control: Half, full.
Flash triggering: 4 channel radio, *digital slave*
PC sync: Optional 5m pc sync cord
Radio transmitter: Included
Recycle: 1 sec./full power
Lamphead cooling: Fan-less, noiseless.
Casing: Aluminum/Engineering plastic.
Reflector: QFH-120 wide angle reflector
Mounting bracket: 5/8"/16mm stand spigot.
Flash auto dump: Yes.
Accessories: All accessories of Imagers.
Power cable: Detachable, 12ft/3.5m, 3 wire.
Fuse: 6A or 3A, with spare fuse.
Size: 5x5x7"/12.5x12.5x17.8cm.
Weight: 3.8lb/1.7kg.

QF-500R

110-130Vac, or 220-240Vac.
500 joules
Ring type (user replaceable)
10,000
5600K,
Yes.
Quarter, half, full.
4 channel radio, *digital slave*
Optional 5m pc sync cord
Included
2.5 sec./full power
Fan-less, noiseless.
Aluminum/Engineering plastic.
QFH-65 standard reflector
5/8"/16mm stand spigot.
Yes.
All accessories of Imagers.
Detachable, 12ft/3.5m, 3 wire.
10A or 5A, with spare fuse.
5x5x12"/12.5x12.5x30.5cm.
4.6lb/2.1kg.

QF-Imagers come with protective cap, 1, 250W 3200K Quartz halogen bulb, 1, 4 channel transmitter, 4 channel receiver is built-in, 12ft power cord. 1, reflector. QF-500 has extra detachable carry handle.

PC sync cord is not included

Radio transmitter has shoe mount and pc sync cable for large format cameras.

Digital slave can sync with digital cameras' pre-flash system.

Tristar Photo Industrial Co.

11 Lung Tak St. 24/F. #7 Tsuen Wan Hongkong SAR

Ph. +852 24086079 Fax +852 24099408 Email triphoto@biznetvigator.net www.tristar-photo.com